


Primeview Indoor LED Display

Unique by Design

PRVLEDFSNM Series

True Black 16x9 Indoor LED Display

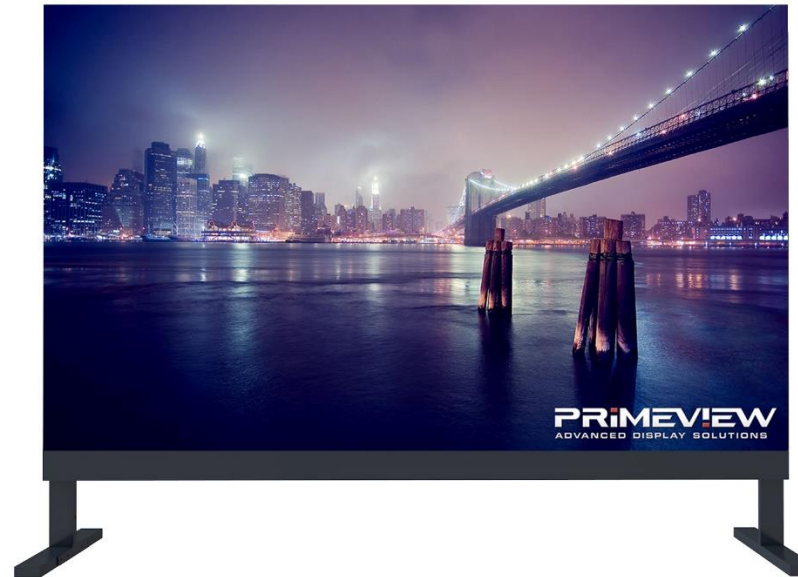

Primeview's new line of LED includes the world's most flexible, Full HD (1920x1080), bezel-free panel display, and eliminates the concerns required with other video wall solutions. Available in a striking 110", 138", 165" or 220", it excels as a solution for digital signage, up-close immersive use, and virtually everything in between. And its scalable 16x9 building block LED means it can be installed in a wider variety of spaces for maximum impact of Executive Boardrooms, Classrooms, Simulation, Retail, Customer Experience Centers, Private Theaters. The building block of the Fusion Max Series of turn-key LED solutions are the Fusion Line of new LED. This is comprised of front-serviceable Fanless cabinets from 1.2mm, 1.5mm, 1.9mm and 2.5mm LEDs. All Fusion LED comes standard with 3-in-1 Integrated Board Design (Power, Receiving Card & Bridge-board), 100k hours rating, 160/160 wide viewing angles, pedestal or wall-mountable framing accessories, optional multi-touch (coming soon) and no-hassle 5-year onsite parts and labor warranty.

PRV Indoor LED Highlights

- Fanless Quiet Design
- 16:9 Aspect Ratio
- 24/7 Industrial Rated
- 16x9 aspect ratio cabinet
- 600 NITS of Brightness
- State-of-the-art Front Servicability
- Broadcast Quality Viewing Angles
- 3-1 Unified Main Board (Power, Receiving Card & Bridge-board)

Technical Specifications

Model		PRVLEDFSNM110	PRVLEDFSNM138	PRVLEDFSNM165	PRVLEDFSNM220
Display Technology	Pixel Pitch	1.27 mm	1.5mm	1.9mm	2.54mm
	Pixel Configuration	SMD (3 in 1)			
	Pixel Density (Pixel / sqm)	620,001	400,576	277,008	155,000
	Resolution	1920 x 1080			
	Refresh Rate	1920 - 4800 Hz			
	Brightness	600 Nits			
	Viewing Angle	160° H / 160° V			
	Colors Temp	2,000 – 9,300K			
	Display Colors	16.7 Million			
Video Inputs	HDMI	2 x Input			
Control	RJ45	1 x Input			
Power	Requirements	110 – 240 Volts			
	Average Consumption Watts	670 W	1050 W	1070 W	2010 W
	Max Consumption Watts	1920 W	3000 W	3060 W	5760 W
Environmental	Operating Temperature	0° - +45°C			
	Operating Humidity	10% - 90% RH			
	IP Rating	IP30			

General	Display Area	96.06" x 54.05" 2,440mm x 1373mm	120.08" x 67.56" 3050mm x 1716mm	144.09" x 81.02" 3660mm x 2059mm	192.13" x 108.1 4880mm x 2745mm
	Overall Dimensions	96.57" x 59.17" x 1.52" 2453 x 1503 x 38.5mm	120.59"x72.68"x1.52" 3063 x 1846 x 38.5mm	144.02"x86.18"x1.52 3673 x 2189 x 38.5mm	192.64"x113.19"x1.52" 4893 x 2875 x 38.5mm
	Display Weight	134/295	201/443	282/621	526.5/1160
	Service Access	Front			
	LED Lifespan	100,000 hours			
	Environment	Indoor			
	Run Time	24/7			
	Standard Warranty	5 Years On-site			